


SG4HS

Human dimension of technology



www.newlast.com

SG4 HS 2
.FRVTM






/ TECHNICAL DATA

(/) N. of pairs working at the same time	2 p
(/ N.) of pairs produced in an hour	120-130 p/h
(/) Roughing cycle time	0.5 min
(Ø /) Max turnable Ø	300 mm
(/) Maximum working length	450 mm
(/) Roughing Pitch	0.5÷20 mm/rev
(/) Rotation speed	10÷120 rev/min÷ rev/max
(Ø /) Roughing Tool Heads (standard)	160x36 mm
(/) installed power	28 Kw
(/) Air pressure	6 bar
(/) Weight	5000 Kg
(/) Dimensions	2850x1900 x2500h mm

SG4 HS can traditionally rough two pairs of shoe lasts, on the original and in all the other sizes.

The exceptional removal capacity of the roughing tools and the particular strenght of the machine structure, allow the use of plastic blocks much larger than the final model. During the working cycle it is also possible to elaborate the next size or a different model.

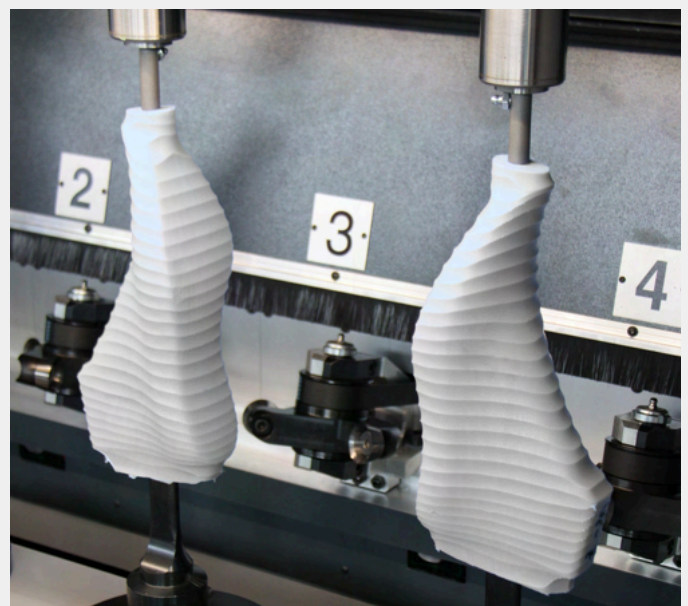

Newlast Group
 Newlast Italia srl · italy@newlast.com
 Via G. Pernigotti 31/A · 15057 Tortona (AL)
 Tel +39 0131894991 · fax +39 0131814530

