


SG4HSZ

Human dimension of technology




newlast
group
www.newlast.com

SG4 HSZ permite el torneado de dos pares de cuñas y otros elementos de madera, como perchas, etc. Partiendo de un bloque de madera en bruto, desbasta y termina en un solo ciclo de trabajo, reduciendo los tiempos de producción y garantizando precisión en el resultado.

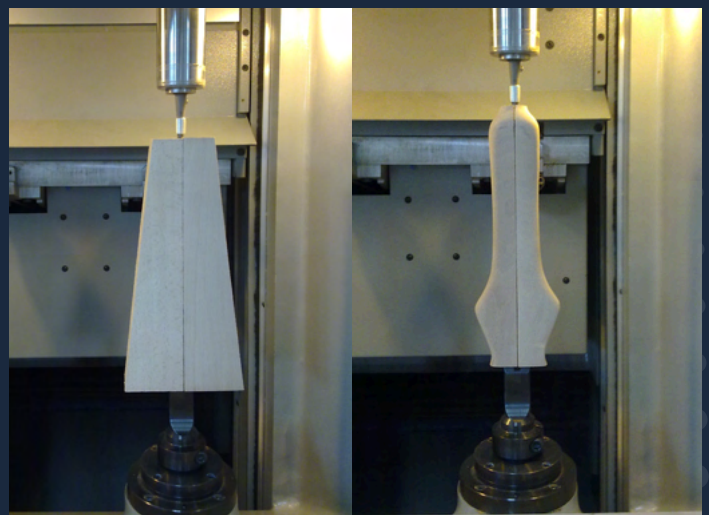




DATOS TÉCNICOS/TECHNICAL DATA

Tiempo ciclo desbaste/ Roughing cycle time	7 min
Ø máximo torneable/ Max turnable Ø	300 mm
Longitud máxima laborable/ Maximum working length	450 mm
Velocidad de rotación/ Rotation speed	10÷120 rev min-rev max
Cabezas de acabado (estándar)/ Roughing Tool Heads(standard)	160x36 mm
Potencia instalada/ installed power	28 Kw
Presión de aire/ Air pressure	6 bar
Peso/ Weight	5000 Kg
Dimensiones/ Dimensions	2850x1900 x2500h mm

SG4 HSZ allows the turning of two pairs of wedges or other wooden elements, such as hangers etc. Starting from a block of wood, SG4 HSZ roughs and finishes in a single work cycle, reducing production times and guaranteeing precision of the result.

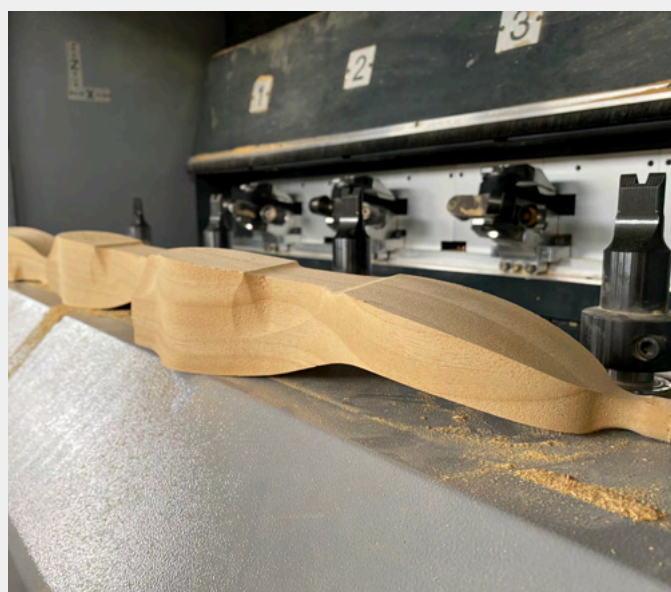

Newlast Group
Newlast Italia srl · italy@newlast.com
Via G. Pernigotti 31/A · 15057 Tortona (AL)
Tel +39 0131894991 · fax +39 0131814530

